


2782 Combination Lock

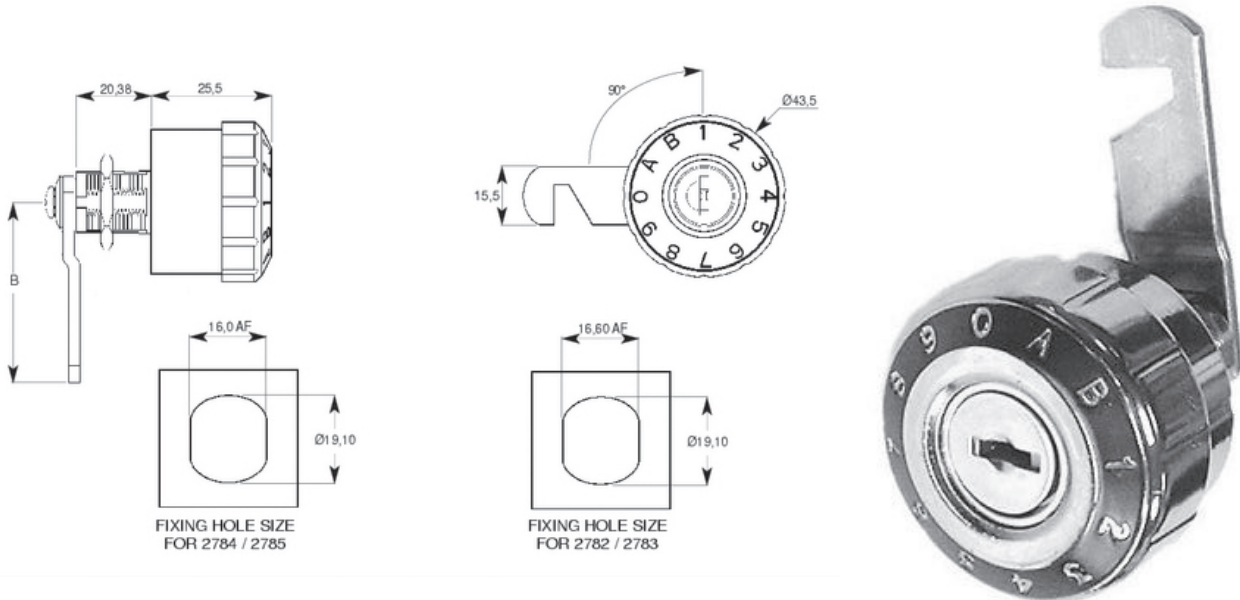

PRODUCT REFERENCE NUMBERS			
PART NUMBER	OVERRIDE KEY SERIES	COMBINATIONS	FIXING
2782/2784	66 DOUBLE ENTRY	600	NUT FIX HOUSING
2789/2785	95 SINGLE ENTRY		
<p>MAXIMUM PANEL THICKNESS : 12.5mm</p> <p>STANDARD MOVEMENT: 01</p> <p>STANDARD FINISH: CHROME WITH BLACK DIAL OVERRIDE KEY AVAILABLE ON REQUEST. COMPREHENSIVE RANGE OF CAMS AVAILABLE: REF SECTION 12 LOCK OPERATION ROTATE DIAL TO THREE CODES, THEN PULL OUT DIAL AND ROTATE CLOCKWISE TO OPEN OPERATING INSTRUCTIONS SUPPLIED WITH LOCK</p>			